


1032, RoHS Compliant
SMD NANO FUSE (FAST-BLOW)
方型超微表面贴片式保险丝 (速断型)

INTERRUPTING CAPACITY / 分断能力:


200A at 250V AC、300A at 125V DC
1000A at 32V DC、600A at 75V DC

Dimensions/ 尺寸

Unit 单位: mm

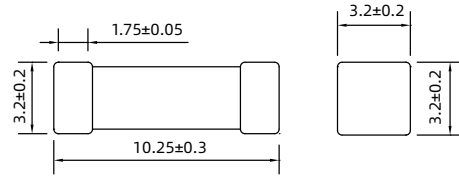

Land Pattern:

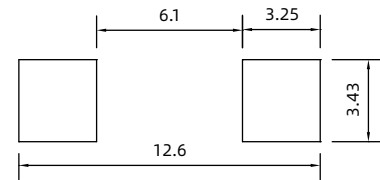

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	RATED VOLTAGE 额定电压	SAFETY APPROVALS 安全认证					REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
			cURus				PSE	
			H	L	L1	L2	H	
3NF-050H/L/L1/L2	5A		●	●	●	●		
3NF-063H/L/L1/L2	6.3A		●	●	●	●	●	
3NF-080H/L/L1/L2	8A		●	●	●	●	●	
3NF-100H/L/L1/L2	10A		●	●	●	●	●	
3NF-120H/L/L1/L2	12A		●	●	●	●	●	
3NF-150H/L/L1/L2	15A		●	●	●	●	●	
3NF-160H/L/L1/L2	16A	250V AC 125V DC	●	●	●	●	●	307
3NF-200H/L/L1/L2	20A	75V DC 32V DC	●	●	●	●	●	961
3NF-250H/L/L1/L2	25A		●	●	●	●	●	963
3NF-300H/L/L1/L2	30A		●	●	●	●	●	784
3NF-350H/L/L1/L2	35A		●	●	●	●	●	1167
3NF-400H/L/L1/L2	40A		●	●	●	●	●	1400
3NF-500H/L/L1/L2	50A		●	●	●	●	●	2116
3NF-600H/L/L1/L2	60A		●	●	●	●	●	5000

● DENOTES FOR APPROVED
H DENOTES FOR 250V
L DENOTES FOR 125V
L1 DENOTES FOR 125V
L2 DENOTES FOR 65V

● 表示已取得安全认证
H 代表 250V
L 代表 125V
L1 代表 75V
L2 代表 32V

ELECTRICAL CHARACTERISTICS/ 电气特性:


% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4 小时
200%	60 seconds Max. 最慢 60 秒

标准: UL 248-1, UL 248-14
工作温度 Operating Temperature: -55°C~ +125°C.
储存温度 Storing Temperature: -55°C~ +85°C.
可焊性: IEC 标准 IEC60068-2-58
耐焊接热性: IEC 标准 IEC60068-2-58

PACKING/ 包装:

2,000 PIECES TAPED AND REELED IN ONE BOX

每卷 2,000 只保险丝, 装入一个包装盒

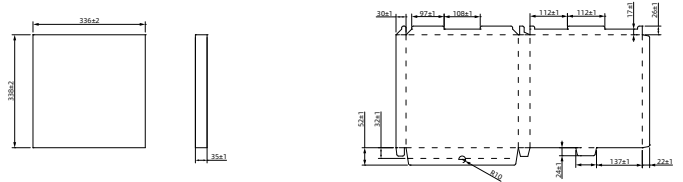

Unit 单位: mm

**3NF THE AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)**

3NF 平均 I-T 曲线图 (仅供参考)

