


1032, RoHS Compliant
SMD NANO FUSE (SLOW-BLOW)
方型超微表面贴片式保险丝 (慢断型)

INTERRUPTING CAPACITY / 分断能力:


50A at 250V AC
100A at 125V AC/DC

Dimensions/ 尺寸

Unit 单位: mm

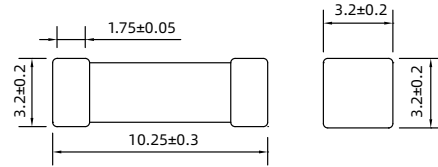

Land Pattern:



TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	RATED VOLTAGE 额定电压	SAFETY APPROVALS 安全认证	
			cURus H	L
3NT-0200H/L	200mA		●	●
3NT-0250H/L	250mA		●	●
3NT-0320H/L	315mA		●	●
3NT-0400H/L	400mA		●	●
3NT-0500H/L	500mA		●	●
3NT-0630H/L	630mA		●	●
3NT-0800H/L	800mA		●	●
3NT-010H/L	1A		●	●
3NT-013H/L	1.25A	125V DC 125V AC	●	●
3NT-016H/L	1.6A	250V AC	●	●
3NT-020H/L	2A		●	●
3NT-025H/L	2.5A		●	●
3NT-032H/L	3.15A		●	●
3NT-040H/L	4A		●	●
3NT-050H/L	5A		●	●
3NT-063H/L	6.3A		●	●
3NT-080H/L	8A		●	●
3NT-100H/L	10A		●	●

● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V H 代表 250V
L DENOTES FOR 125V L 代表 125V

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	120 seconds Max.	最慢 120 秒

Standards/ 标准: UL 248-1, UL 248-14

工作温度 Operating Temperature: -55°C~ +125°C.

储存温度 Storing Temperature: -55°C~ +85°C.

可焊性: IEC 标准 IEC60068-2-58


耐焊接热性: IEC 标准 IEC60068-2-58

PACKING/ 包装:

2,000 PIECES TAPED AND REELED IN ONE BOX

每卷 2,000 只保险丝, 装入一个包装盒

BOX SIZE/ 包装盒尺寸:

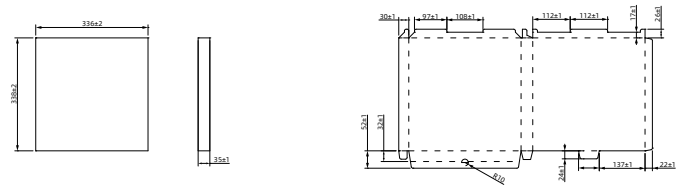

Unit 单位: mm

**3NT THE AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)**

3NT 平均 I-T 特性曲线图 (仅供参考)

