



65NM
 Φ6.35x32mm, RoHS Compliant & Pb-Free
CERAMIC TUBE FUSE (FAST-BLOW)
 瓷保险丝管 (速断型)

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证												REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值		
		UL(cUL)				UR(cUR)				PSE		KC				
		H1	H	L	L1	H1	H	L	L1	H	L	H	L			
65NM-0300H/L	300mA														●	0.0149
65NM-0315H/L	315mA														●	0.0169
65NM-0350H/L	350mA														●	0.0227
65NM-0375H/L	375mA														●	0.0272
65NM-0400H/L	400mA														●	0.0339
65NM-0500H/L	500mA	●	●	●											●	0.0716
65NM-0600H/L	600mA	●	●	●											●	0.1068
65NM-0630H/L	630mA	●	●	●											●	0.1162
65NM-0750H/L	750mA	●	●	●											●	0.2233
65NM-0800H/L	800mA	●	●	●											●	0.2871
65NM-010H/L	1A	●	●	●						●	●	●			●	0.5843
65NM-012H/L	1.2A	●	●	●						●	●	●			●	0.6298
65NM-013H/L	1.25A	●	●	●						●	●	●			●	0.7173
65NM-015H/L	1.5A	●	●	●						●	●	●			●	1.7168
65NM-016H/L	1.6A	●	●	●						●	●	●			●	2.011
65NM-020H/L	2A	●	●	●						●	●	●			●	1.712
65NM-025H/L/L1	2.5A	●	●	●	●					●	●	●			●	3.232
65NM-030H/L/L1	3A	●	●	●	●					●	●	●			●	5.032
65NM-032H/L/L1	3.15A	●	●	●	●					●	●	●			●	5.573
65NM-035H/L/L1	3.5A	●	●	●	●					●	●	●			●	8.111
65NM-040H/L/L1	4A	●	●	●	●					●	●	●			●	12.78
65NM-050H/L/L1	5A	●	●	●	●					●	●	●			●	25.64
65NM-060H/L/L1	6A	●	●	●	●					●	●	●			●	50.61
65NM-070H/L/L1	7A	●	●	●	●					●	●	●			●	84.09
65NM-080H/L/L1	8A	●	●	●	●					●	●	●			●	120.4
65NM-090H/L/L1	9A	●	●	●	●					●	●	●			●	167.1
65NM-100H/L/L1	10A	●	●	●	●					●	●	●			●	234.1
65NM-120H/L/L1	12A	●	●	●	●					●	●	●			●	467.2
65NM-150H/L/L1	15A	●	●	●	●					●	●	●			●	720.1
65NM-200H/L/L1	20A					●	●	●	●	●	●	●			●	2008
65NM-250H/L/L1	25A					●	●	●	●	●	●	●			●	3061
65NM-300H/L/L1	30A					●	●	●	●	●	●	●			●	6205

● DENOTES FOR APPROVED ● 表示已取得安全认证
 H₁ DENOTES FOR 300V AC H₁ 表示 300V AC
 H DENOTES FOR 250V H 表示 250V
 L DENOTES FOR 125V AC L 表示 125V AC
 L₁ DENOTES FOR 125V DC L₁ 表示 125V DC

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
135%	1 hour Max.	最慢 1 小时
200%	120 seconds Max.	最慢 120 秒


Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~125°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.
Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

INTERRUPTING CAPACITY / 分断能力:

10,000 amperes at 125V AC (500mA-15A)
 35 amperes at 250V AC (500mA-1A)
 100 amperes at 250V AC (1.2A-3.5A)
 200 amperes at 250V AC (4A-10A)
 750 amperes at 250V AC (12A-15A)
 100 amperes at 125V AC (20A-30A)
 100 amperes at 250V AC (20A-30A)
 1000 amperes at 300V AC (20A-30A) UR/cUR
 1000 amperes at 300V AC (0.5A-15A) UL/cUL
 500 amperes at 125V AC (1A-15A) PSE
 100 amperes at 250V AC (1A-30A) PSE
 100 amperes at 250V AC (300mA-3A) KC
 100 amperes at 250V AC (4A-10A) KC
 10,000 amperes at 125V DC (2.5A-15A) UL/cUL
 400 amperes at 125V DC (20A-30A) UR/cUR

Dimensions/ 尺寸:

Unit 单位: mm

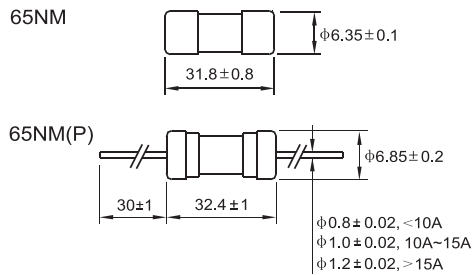

**65NM AVERAGE I-T CHARACTERISTICS CURVE
 (FOR REFERENCE ONLY)**

65NM 平均 I-T 曲线图 (仅供参考)

