

# HC10LPV-CT 1A-35A

## Photovoltaic Fuse

### 光伏熔断器




Standard/ 标准: UL 248-19

INTERRUPTING CAPACITY / 分断能力:  
30,000 A at 1500V DC


Dimensions/ 尺寸:

Unit 单位: mm


Part No.: 10LPV(amp rating)U15-CT 1500V 1-4A




Part No.: 10LPV(amp rating)U15-CT 1500V 5-35A



Part No.: 10LPV(amp rating)U15-CTL 1500V 1-4A



Part No.: 10LPV(amp rating)U15-CT 1500V 5-35A




#### ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
135%	1 hour Max. 最慢 1 小时
200%	240 seconds Max. 最慢 240 秒

#### HC10LPV-CT 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE  
(FOR REFERENCE ONLY)

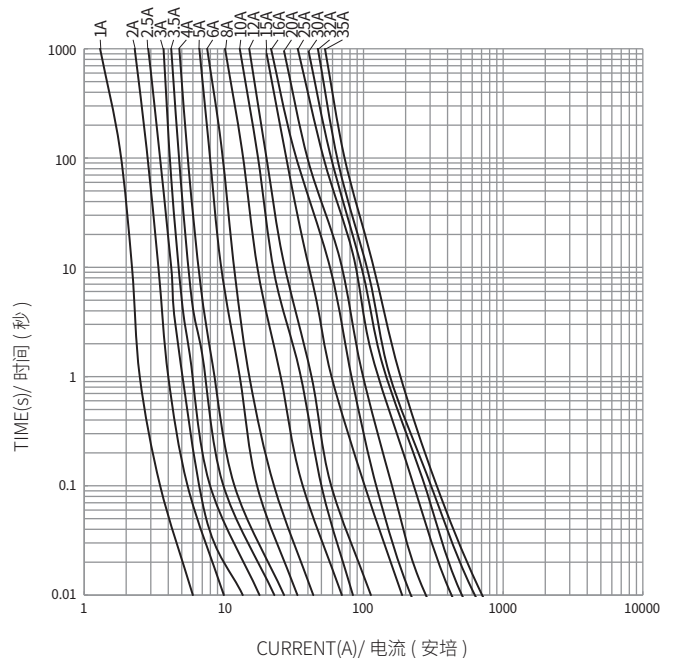

#### TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号		CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证		
端子外径尺寸 5.5mm	端子外径尺寸 6.5mm		TUV	cULus	cURus
10LPV1U15-CT	10LPV1U15-CTL	1A	○	●	○
10LPV2U15-CT	10LPV2U15-CTL	2A	○	●	○
10LPV3U15-CT	10LPV3U15-CTL	3A	○	●	○
10LPV3.5U15-CT	10LPV3.5U15-CTL	3.5A	○	●	○
10LPV4U15-CT	10LPV4U15-CTL	4A	○	●	○
10LPV5U15-CT	10LPV5U15-CTL	5A	●	●	○
10LPV6U15-CT	10LPV6U15-CTL	6A	●	●	○
10LPV8U15-CT	10LPV8U15-CTL	8A	●	●	○
10LPV10U15-CT	10LPV10U15-CTL	10A	●	●	○
10LPV12U15-CT	10LPV12U15-CTL	12A	●	●	○
10LPV15U15-CT	10LPV15U15-CTL	15A	●	●	○
10LPV16U15-CT	10LPV16U15-CTL	16A	●	○	●
10LPV20U15-CT	10LPV20U15-CTL	20A	●	○	●
10LPV25U15-CT	10LPV25U15-CTL	25A	○	○	●
10LPV30U15-CT	10LPV30U15-CTL	30A	○	○	●
10LPV32U15-CT	10LPV32U15-CTL	32A	○	○	●
10LPV35U15-CT	10LPV35U15-CTL	35A	○	○	●

U15 DENOTES FOR 1500V DC	U15 表示 1500V DC
● DENOTES FOR APPROVAL	● 表示已取得安全认证
○ DENOTES FOR PENDING	○ 表示正在申请安全认证