



NH1LgR-B 1140V AC 50A-250A

Class of Operation: gR

保护特性: gR



Standard/ 标准: UL248-13


INTERRUPTING CAPACITY / 分断能力:

100,000 amperes at 1140V AC


Dimensions/ 尺寸:

Unit 单位: mm


Type: NH1LgR-B Part No.: 1LgR (amp rating)U11B

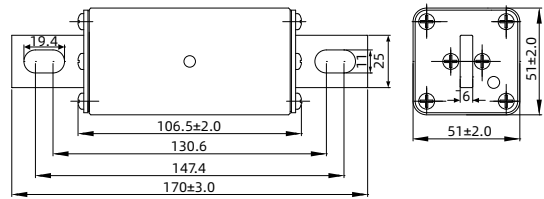

Type: NH1LgR-B Part No.: 1LgR (amp rating)U11BC

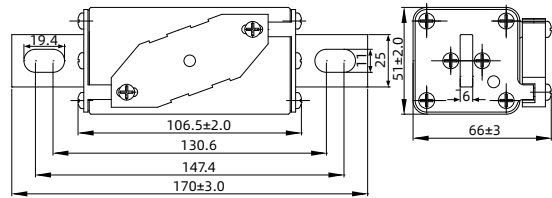

Type: NH1LgR-B Part No.: 1LgR (amp rating)U11BD

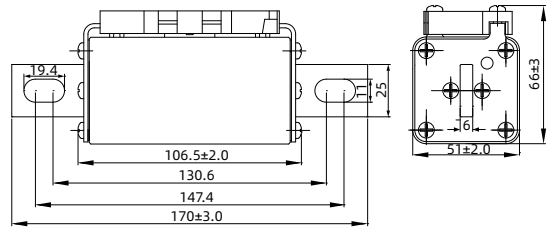

TECHNICAL PARAMETERS/ 技术参数:

| PART NO. 目录编号 | CURRENT RATING 额定电流 | SAFETY APPROVALS 安全认证 | |
|------------------|------------------------|--------------------------|---|
| | | cURus | |
| NH1LgR50U11B | 50A | ● | ● |
| NH1LgR50U11BC | | | |
| NH1LgR50U11BD | | | |
| NH1LgR63U11B | 63A | ● | ● |
| NH1LgR63U11BC | | | |
| NH1LgR63U11BD | | | |
| NH1LgR80U11B | 80A | ● | ● |
| NH1LgR80U11BC | | | |
| NH1LgR80U11BD | | | |
| NH1LgR100U11B | 100A | ● | ● |
| NH1LgR100U11BC | | | |
| NH1LgR100U11BD | | | |
| NH1LgR125U11B | 125A | ● | ● |
| NH1LgR125U11BC | | | |
| NH1LgR125U11BD | | | |
| NH1LgR160U11B | 160A | ● | ● |
| NH1LgR160U11BC | | | |
| NH1LgR160U11BD | | | |
| NH1LgR200U11B | 200A | ● | ● |
| NH1LgR200U11BC | | | |
| NH1LgR200U11BD | | | |
| NH1LgR250U11B | 250A | ● | ● |
| NH1LgR250U11BC | | | |
| NH1LgR250U11BD | | | |

U11DENOTES FOR 1140V AC

● DENOTES FOR APPROVAL

○ DENOTES FOR PENDING

U11 表示 1140V AC

● 表示已取得安全认证

○ 表示正在申请安全认证

ELECTRICAL CHARACTERISTICS/ 电气特性:

| Rated Current In(A) 额定电流 In(A) | CONVENTIONAL TIME(H) 约定时间 | CONVENTIONAL CURRENT 约定电流 | |
|-----------------------------------|---------------------------|---|--|
| | | CONVENTIONAL NON-FUSING CURRENT(A) 约定不熔断电流 | CONVENTIONAL FUSING CURRENT(A) 约定熔断电流 |
| In ≤ 63 | 1 | | |
| 63 < In ≤ 160 | 2 | 1.25In | 1.6In |
| 160 < In ≤ 400 | 3 | | |

NH1LgR-B 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE)

